
General Purpose Temperature Transmitter

Model : T155 (Circular Connector)
T156 (DIN Connector)
T157 (Flying Leads)
T158 (General Head)

**WISE
SENSOR**

Advantages

- Two wire 4~20mA current output signal
- RTD inputs
- Measuring ranges from -50 to 500 C
- Loop powered 4~20mA
- Excellent accuracy and long term stability

Applications

These are recommended in applications requiring amplification of low level RTD signals to carry to a long distance or guard against heavy field electrical noise. The transmitter converts RTD inputs to an analog signal for direct interface with indicators, recorders, controllers, PLC, DCS systems can be used for a wide range of applications in process control, automatic machinery and hydraulic or pneumatic system design.



T155



T156



T157



T158

Descriptions



T150 series temperature transmitters are designed to fit into standard weather terminal heads used on RTD assemblies to provide a 4~20mA transmission signal. It is a cost effective solution for all temperature measurement and accurate, durable and reliable. Numerous configurations for measurement in many different mediums are offered. Generally the transmitter produces a linear 4~20mA output carried on a 2-wire system and optional voltage range of 1~5V DC can also be available. The transmitter is supplied factory calibrated, but also has zero and span potentiometers for field adjustment or calibration. T150 provides a loop powered 4~20mA/2-wire and in the hazardous environment, explosion protected terminal head can be also available.

Specification

Input				
Measuring range	PT100 ohm, JIS-C-1604-1981			
Thermocouple	-50~500°C			
Output				
	Current output		Voltage output	
Electrical connection type	2-wire technique		3 or 4-wire technique	
Full scale output signal	20mA	±0.2%	5V	±0.2%
Zero measured output	4mA	±0.03%	1V	±0.03%
	Other signals available on request			
Electrical Specification				
Excitation voltage	24V DC(12~36V DC)			
Load resistance max @ 24V	500Ω at 24V			
Influence of excitation	0.01% FSO/V			
Burnout	Upscale(approx. 23mA DC) or downscale(approx. 3mA DC)			
Reverse polarity	Protected			
Shock resistance	No change in performance after 10Gs for 11ms			
Vibration	5g (10~2000Hz)			
Response time(10~90%)	± 500 mSec.			
Adjustment	± 20% FSO/zero and span (Fixed value by default)			
Performance Specification				
Accuracy	≤ ±0.2% FSO			
Non-Linearity	Better Than 0.10% FSO			
Repeatability	Better Than 0.05% FSO			
Long term stability	Better Than 0.05% FSO per month			
Cutoff frequency(-3 d B)	± 2KHz			
Ambient temperature limits	-20~85°C			
Ambient operating humidity	5~100% RH			
Physical Specification				
Process connection	PT, NPT male thread			
	Other connections available on request			
Process media	Gases and liquids compatible with stainless steel 316			
Materials wetted by process	Stainless steel 316 and others available on request			
Enclosure rating	IP65			
Influence of mounting position	Not critical			
Options	Protection well			

System connection for 2-wire transmitter


System connection for 3-wire transmitter

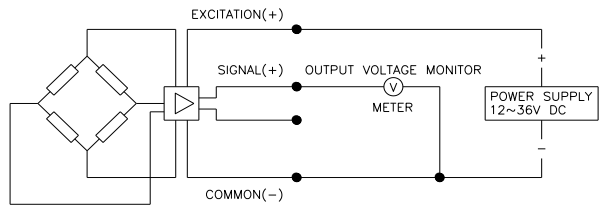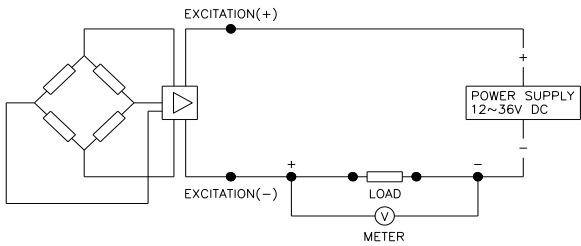


Dimension (mm)

Electrical connection


< T155 >

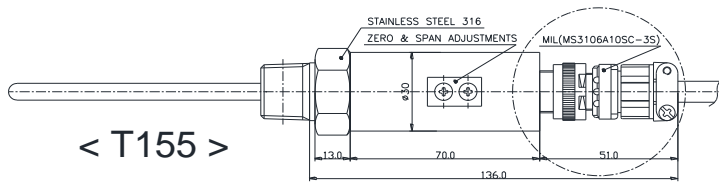



< T156 >

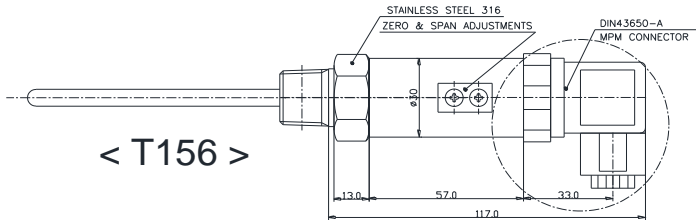


< T157 >

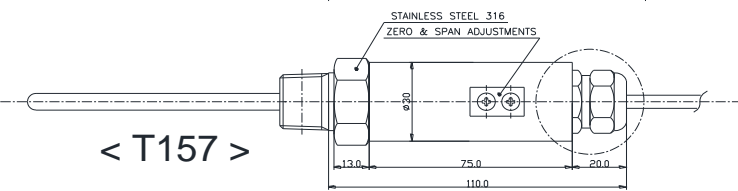


< T158 >

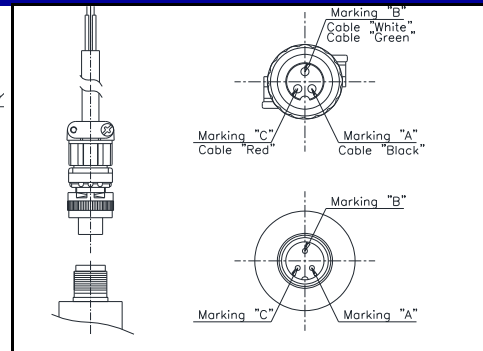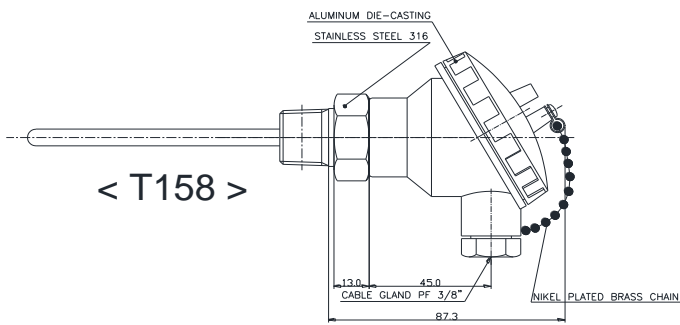

< T155 Electrical connector >

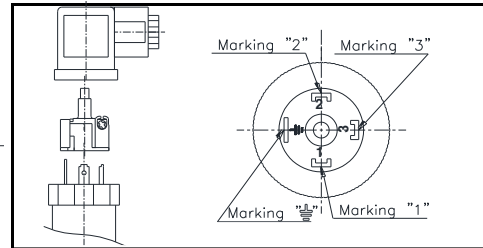

< T156 Electrical connector >

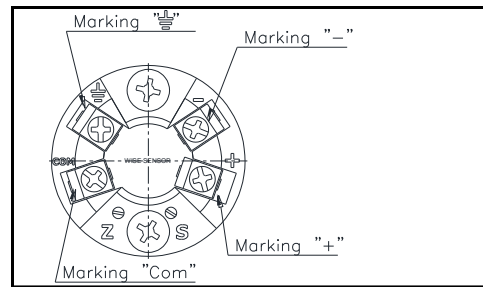

< T158 Electrical connector >

• Wiring diagrams

E : Excitation
S : Signal
C : Common

System Conn.	Wire	Wire		
		2	3	4
T	Red	E +	E +	E +
1	Black	E -	C -	E -
5	Green		S +	S +
5	White			S -
	GND	Shielded	Shielded	Shielded
T	1	E +	E +	E +
1	3	E -	C -	E -
5	4		S +	S +
6	GND	Shielded	Shielded	S -

System Conn.	Wire	Wire		
		2	3	4
T	Red	E +	E +	E +
1	Black	E -	C -	E -
5	Green		S +	S +
7	White			S -
	GND	Shielded	Shielded	Shielded
T	+	E +	E +	E +
1	-	E -	C -	E -
5	Com		S +	S +
8	GND	Shielded	Shielded	S -

Ordering Information

General Purpose Temperature Transmitter

1. Base model

T155										Circular Connector
T156										DIN Connector
T157										Flying lead(1.5m cable)
T158										General Head

2. Input signal

P										PT 100 Ω
N										None signal

3. Process connection type "1"

M										Male thread
F										Flange mounted

4. Process connection type "2"

T										PT thread as standard
J										Frang per JIS
D										Frang per DIN
A										Frang per ANSI
X										Other process connection available on request

5. Process connection size

1										1/2"
2										1"
3										2"
X										Other size available on request

6. Thermo-well

S										With protection thermo-well
N										Without protection thermo-well

7. Measuring range

01										-50~0 °C
02										-50~50 °C
03										-20~80 °C
04										-50~150 °C
05										0~50 °C
06										0~100 °C
07										0~150 °C
08										0~200 °C
09										0~300 °C
10										0~400 °C
11										0~500 °C
XX										Other calibration ranges available on request

8. Unit

K										Calibration in Celsius scale °C
A										Calibration in Fahrenheit scale °F

9. Output

A1										4~20mA, DC, 2-wire output
A2										4~20mA, DC, 4-wire output
B1										1~5V, DC, 3-wire output
B2										0~5V, DC, 3-wire output (Only available T156 and T157)
B3										0~10V, DC, 3-wire output (Only available T156 and T157)

10. Option

N										None options
---	--	--	--	--	--	--	--	--	--	--------------

T156	P	M	T	1	N	01	K	A1	N	Sample ordering code
------	---	---	---	---	---	----	---	----	---	----------------------

Specifications subject to change without notice